



Steambaths and Saunas

Steambath Control

Model: DSC-425

Product Information – DSC-425

Programmable time and temperature.

Digital display of ambient, pre set temperature and elapsed time.

LED shows generator heating element is engaged.

Dimensions: 4 $\frac{3}{4}$ " x 4 $\frac{3}{4}$ "

Package Includes: Control, 25-Ft. Multi-Conductor Cable, 3199 series steamhead, Strain Relief Clamp, (4) S/S Mounting Screws, Silicone Sealant, Installation and Operating Instructions.

Required Electrical Service: Low-voltage connection from SM generator via multi-conductor cable (supplied).

Product No. - Finishes:

425-10 - Polished Chrome

425-12 - Polished Nickel


425-13 - Brushed Nickel

425-16 - Antique Brass

425-17 - Polished Brass

425-18 - Polished Gold

425-19 - Oil Rubbed Bronze

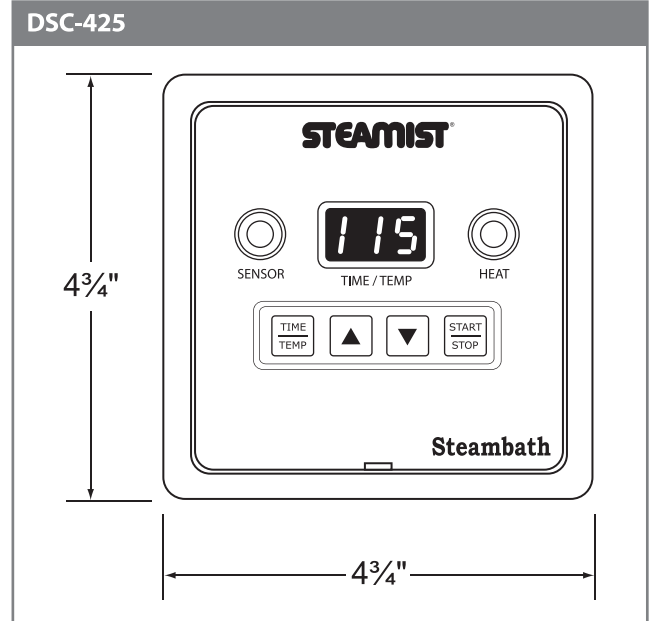

Notes

Installation Notes

Requires (2) single metal gangable switch boxes twinned together, tear out center for tight fit.

Mounts *INSIDE* the steam room *ONLY*.

Steamist recommends that the multi-conductor cable be run through $\frac{3}{4}$ " conduit to protect cable from damage and to facilitate easy replacement.

Mount control near seating area and not above steamhead.

Rough-in Notes

Control should be mounted 48" above the floor.

Steamhead to be mounted 18" above the finished floor or 6" above the rim of the tub and as far from the seating area as possible.



East Coast Office: 275 Veterans Blvd., Rutherford, NJ 07070 • Tel: 800-577-6478 • Fax: 201-933-0746

West Coast Office: 315 W. Pondera St., Suite F, Lancaster, CA 93534 • Tel: 800-355-6478 • Fax: 661-940-1617