

# STEAMIST®

Steambath Control

Model: DSP

## Product Information – DSP

### DSP Package Includes Both:

**DTC-200 Programmable Timer** - Displays set and elapsed time with start/stop button.

**DTC-225 Programmable Thermostat** - Displays setpoint and ambient temperature with start/stop button..

**Dimensions:** 4 ¾" x 4 ¾"

**Package Includes:** (2) controls, (2) 25-Ft. multi-conductor Cables, 3199 series steamhead, splitter, strain Relief Clamp, (4) steel mounting screws for DTC-200 (outside), (4) S/S mounting screws for DTC-225 (inside), Silicone Sealant, Installation and Operating Instructions.

**Required Electrical Service:** Low-voltage connection from SM generator via (2) multi-conductor cables (supplied).

### Product No. - Finishes:

**DSP-10** - Polished Chrome

**DSP-12** - Polished Nickel

**DSP-13** - Brushed Nickel


**DSP-16** - Antique Brass

**DSP-17** - Polished Brass

**DSP-18** - Polished Gold

**DSP-19** - Oil Rubbed Bronze

## DTC-200 Outside Timer Control

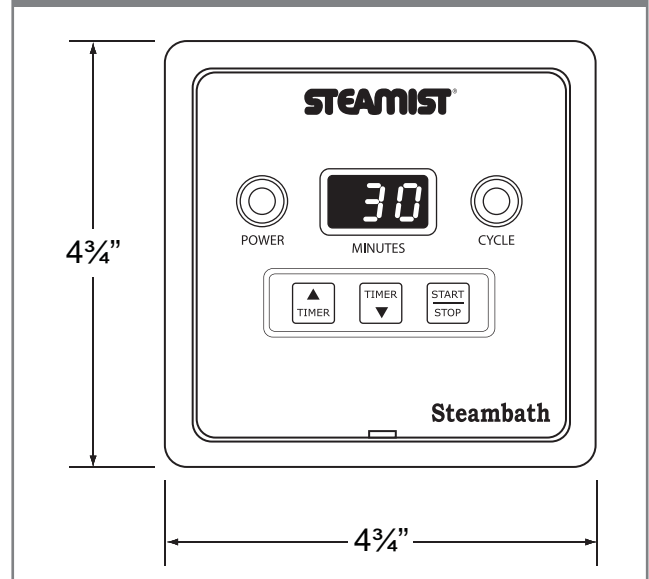

## Notes

### Installation Notes

Requires (2) single metal gangable switch boxes twinned together for tight fit (per control).

**DTC-200** mounts **outside** the steam room only.

**DTC-225** mounts **inside** the steam room only and not above steamhead.

Steamist recommends that the multi-conductor cable be run through ¾" conduit to protect cable from damage and to facilitate easy replacement.

Temperature Control (DTC-225) will not operate without the Timer Control (DTC-200).

### Rough-in Notes

DTC-200 and DTC-225 are recommended to be mounted 48" above the floor.

Steamhead is to be mounted 18" above the finished floor or 6" above the rim of the tub and as far from the seating area as possible.

## DTC-225 Inside Temperature Control

